


On-site Wastewater Management Training Course

Soil Absorption Systems; Trenches and Beds

Honorary Associate Professor Phillip Geary
School of Environmental & Life Sciences
The University of Newcastle NSW

Schematic of On-site System Design Using Soil Absorption

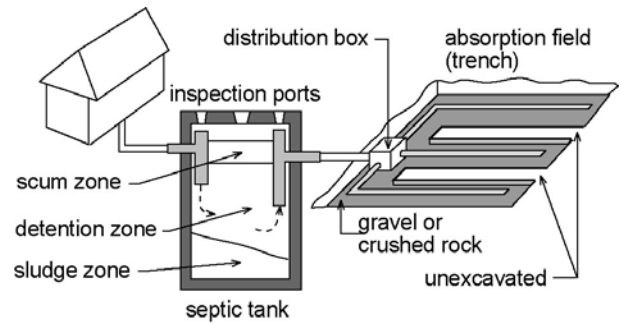


Soil Based Systems

Design of soil absorption system and calculation of lineal metres of trench needs to be based on hydraulic capacity of most limiting horizon or layer


- Significant physical, chemical and microbiological treatment of effluent occurs in unsaturated soils
- Older absorption systems often rely on the distribution of effluent subsurface by gravity, but operate better when pressurised
- The poor performance of systems is often related to an inadequate understanding of the hydraulic capacity of the receiving soils

Subsurface Effluent Disposal

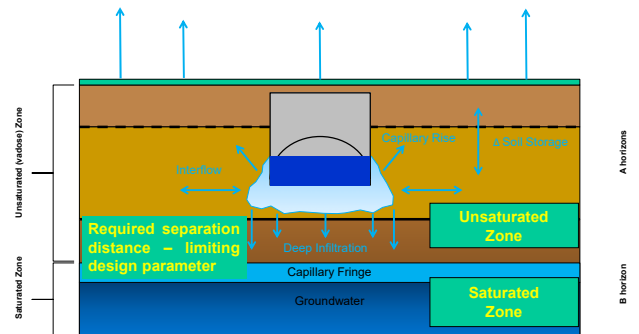

Standard Trench Designs


All trenches for effluent comprise a basic distribution module surrounded by soil




Cromer, W. C. (2013). Nonconventional beds: Notes for designers, installers and regulators, July 2013. Land application systems for domestic wastewater management. Unpublished report by William C Cromer Pty Ltd, 7 July 2013.

Soil absorption trenches may involve piped, boxed or arch trenches

Conventional Piped/Boxed Trench (AS/NZS 1547: 2012)

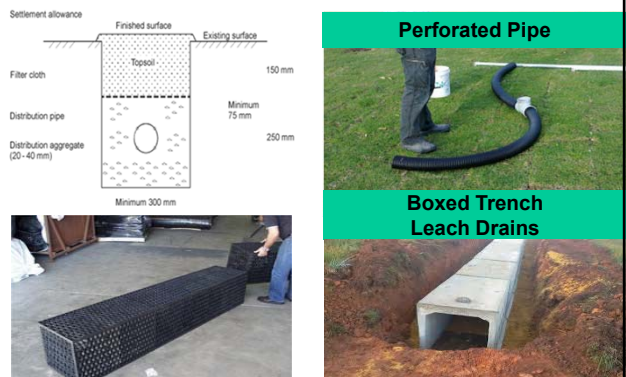

Self Supporting Arch Trench (AS/NZS 1547: 2012)

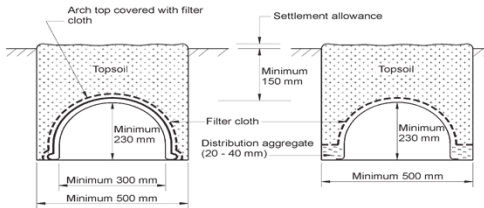


Tunnel Trench

Centre for Environmental Training



LPED Pressure Dosed Shallow System

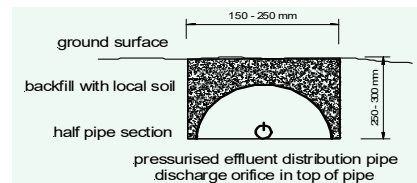

Centre for Environmental Training




Standard ET or ETA Bed

- Lined or unlined systems use absorption, as well as evaporation and transpiration (evapotranspiration)
- Vegetation cover must be maintained to optimise evapotranspiration
- Effluent drawn up from storage into root zone of plants by capillary action
- Shape of surface designed to maximise runoff
- Surface area calculation (water balance required)
- Often used where site limitations exist e.g. in locations with low permeability soils and useful in drier climates

Centre for Environmental Training



Typical Cross-section of Piped ET Bed

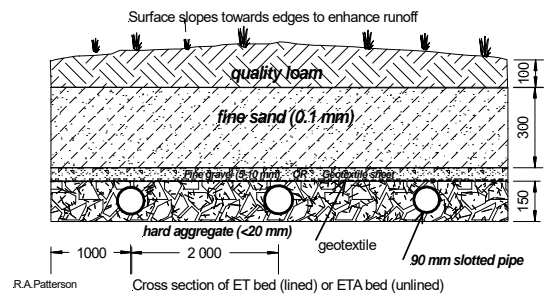

R.A.Patterson
Cross section of ET bed (lined) or ETA bed (unlined)
See Patterson, R.A. Evapotranspiration Bed Designs for Inland Areas
<http://anfaxlabs.com.au/papers/P51-Technical%20Sheet%20%20Evapotranspiration-aug06.pdf>
Centre for Environmental Training



Design of Subsurface Systems ...

Depends on:

- Hydraulic capacity of soil - limiting design parameter (LDP) for soils of low hydraulic conductivity
- Purification ability of soil - not easily assessed
- Hydraulic load - application rate of wastewater
- A simple set of design criteria which adequately considers all the above factors does not exist

Centre for Environmental Training






Design Loading Rate (DLR)

- Infiltration of effluent into soil is limited by clogging layer, but soil texture and structure are important too
- DLR of soil expressed in L/m²/d
- DLR is always << clean water permeability



Clogging Layer

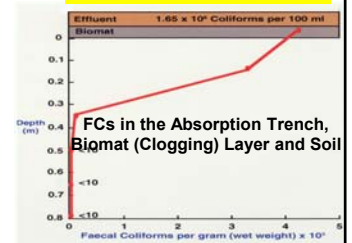

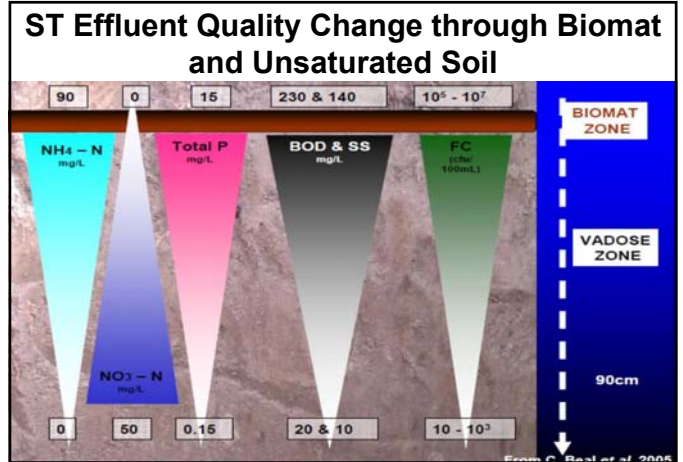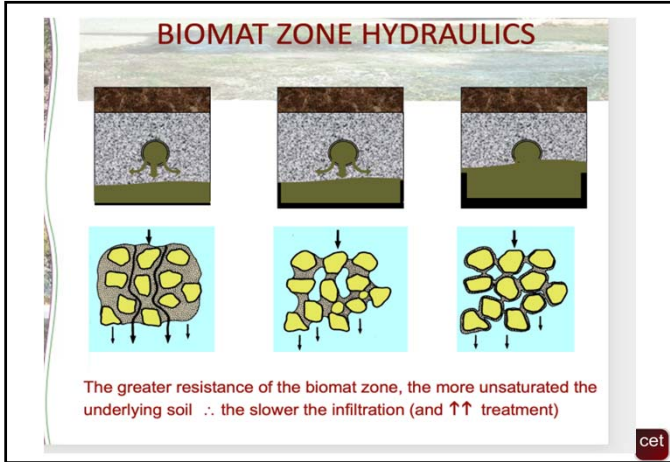

DLR for Trenches and Beds

(Adapted from Table L1 AS/NZS1547:2012)

Soil Category	Soil Texture	Structure Range of categories not shown	Indicative K (m/d)	Primary Conserv. DLR (mm/d)	Primary Max. DLR (mm/d)
1	Gravels & sands	Massive	> 3.0	See note	See note
2	Sandy loams	Range	1.4 - 3.0	15	25
3	Loams	Range	0.5 - 3.0	10	25
4	Clay loams	Range	0.06 - 1.5	4	15
5	Light clays	Range	0.06 - 0.5	5	8
6	Heavy clays	Range	< 0.06 - 0.5	See note	See note

For primary treated effluent conservative DLR should be used

- ### Soil Absorption - Simple Example
- Assume soil DLR is 15 mm/d*
 - Assume hydraulic load is 150 L/p/d
 - 1 Litre of water or effluent applied to 1 m² covers to a depth of 1 mm
 - Maximum effluent loading rate should therefore not exceed 15 L/m² otherwise failure will occur
 - Required contact area is therefore 10 m² (based on hydraulic load (150 L divided by DLR of 15 L/m²)
- *Remember – 1 mm/day is equivalent to a loading rate of 1 L/m²/day
For example, 20 mm/day is dimensionally equivalent to 20 L/m²/day

- ### Design Method - Trenches and Beds
- (AS/NZS1547:2012)
- Undertake SSE procedure and determine land capability constraints and setbacks or buffers - need suitable deep soil for absorption
 - Assuming site and soil appropriate (not in medium or heavy clay), select primary DLR taking into account any limiting factors raised in SSE report
 - Size disposal areas according to:

$$L = Q / (DLR \times W)$$
- where L = trench length (m), Q = design daily flow (L/d), DLR = design loading rate (mm/d) and W = width (m)

Director's Guidelines OWMS Tasmania

Table 3 Minimum Land Application Area

Soil category for top 1.5m of soil profile as listed in AS/NZS 1547, (refer notes)	Area required per bedroom for primary treatment effluent (m ²) reduce by 50% if secondary treated effluent discharged to a trench, bed or mound	Area required per bedroom for irrigated secondary treated effluent (m ²)		
		Slope		
		<10%	10-20%	>20%
1 (Sand)	50	50	60	100
2 (Sandy loam)	60	55	66	110
3 (Loam)	90	70	84	140
4 (Clay loam)	120	80	96	160
5 (Light clay)	180	100	120	200
6 (Clay)	180	130	156	260

Table 3 Minimum LAA - Notes

Notes to Table 3:

- Where the soil in the upper 1.5 m of the soil profile comprises two or more soil categories, the required area must be calculated on the basis of the requirements for the predominant soil category.
- If dispersive soils or a limiting layer are encountered within the upper 1 m of the soil profile, then the area required must be calculated on the basis of the requirements for Category 6 soil.
- Minimum land application area for primary treated wastewater including land that is reserved for future waste land application.
- Slope means the average gradient of the land across the land application area.

Design Method - Trenches and Beds

(AS/NZS1547:2012)

- Example: $L = Q / (DLR \times W)$
- Daily design hydraulic load $Q = 750 \text{ L/d}$
- DLR $15 \text{ L/m}^2/\text{d}$ (assessed by designer based on field measurement or field/lab textural method; conservative DLR used for primary effluent)
- Assume a trench 1 m wide then,
- $L = 750 / (15 \times 1) = 50 \text{ lineal metres}$
- DLR in AS/NZS1547 (2012) is to be used to size horizontal bottom area only in trenches and beds


Alternative Trench Systems and Non-conventional Beds

- Variety of alternatives to traditional trench and bed designs
- NcBs seek to enhance the performance of more traditional trenches and bed designs
- Make use of larger basal area, inter-trench space for evapotranspiration using various plants and/or provide additional treatment (i.e. filtration) so that higher design loading rates can be applied

Wick Trench and Bed

- For use in clay soils but can be used in other soil types too
- Suitable for both Primary and Secondary effluent
- Suited to small blocks
- Assists trench seepage with evapotranspiration from adjacent bed
- Evapotranspiration bed can be either side of trench
- Trench and bed are linked by a geotextile wrap which lies both under and over the trench and bed
- Geotextile wick draws moisture upwards by capillary action into the root zone of the vegetation above
- Design calculation uses loading factor to reflect improved storage/ET efficiency in the design

Cross-section of a Wick Design

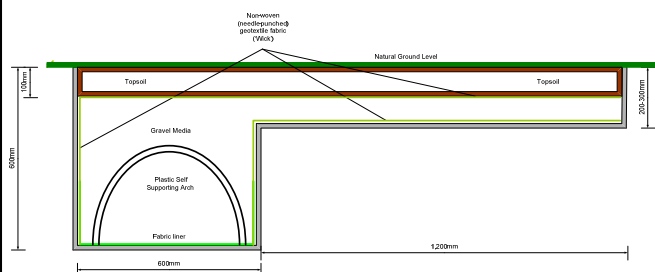

Designer: Kerry Flanagan
See WaterNSW 2019 Publication

Source: Designing and Installing On-Site Wastewater Systems - A WaterNSW Current Recommended Practice



Advanced Enviro-Septic (AES)


- Combined treatment and disposal pipe system
- Pipes installed in the land application area as either absorption trenches or evapo-transpiration beds and surrounded by a layer of coarse washed sand
- Pipes are corrugated, perforated, high-density plastic with a series of ridges and “skimmers” extending into its interior
- Skimmers capture grease and expose to aerobic degradation
- A non-woven geo-textile plastic fabric around the mat of fibres – acts as filter and surface for biomat growth
- Sand allows air transfer to biomat surface and further filtration before effluent enters underlying soil

<https://www.enviro-septic.com.au/>

Centre for Environmental Training



Advanced Enviro-Septic (AES)

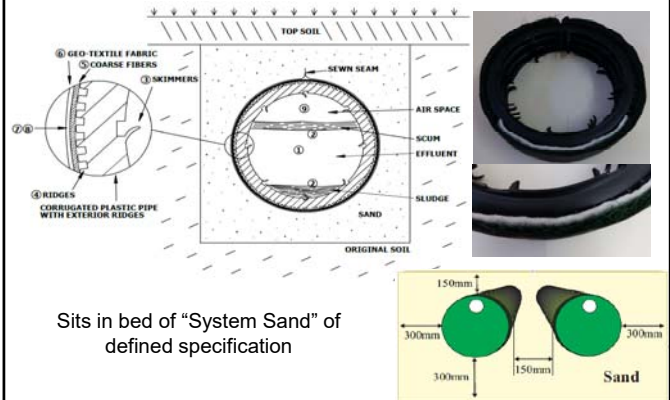

Sits in bed of “System Sand” of defined specification

System Sizing

- Manufacturer recommends maximum hydraulic load of 114 L per pipe length (3 metre) – loading rates approx. 38 L/m² for secondary or 30 L/m² for advanced secondary
- Trench or bed basal area sized on Secondary treated effluent loading rates of AS/NZS 1547:2012 (Table L1)
- In QLD considered a Secondary treatment system
- In NSW not considered a sewage management facility but a land application system and requires approved system for Primary treatment (septic tank)




Evapotranspiration Trenches

- Use balance tank after ST and consists of separate linked concrete pods
- Small footprint raised garden beds filled with imported suitable soil
- Suitable for poor soils and difficult sites
- Effluent remains subsurface and is recirculated
- Commercial term Rhizopods



Rhizopod Beds

www.aris.com.au

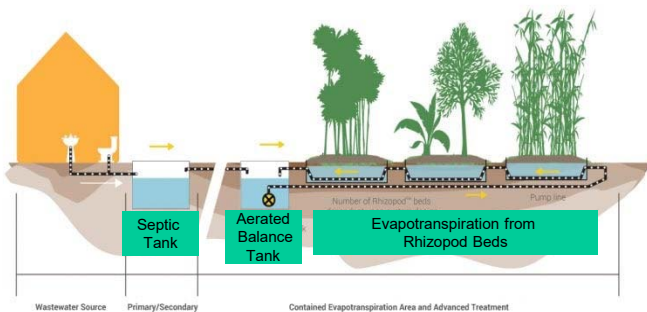

Evapo(transpiration) Beds

- Above ground land application evaporative system
- Bed of substrate where wastewater is evaporated
- Materials such as treated timber, corrugated iron and brick used to enclose substrate
- Suitable for poor soils and difficult sites
- Plants and landscaping can be incorporated into the design
- 4 bdr 1,000 L/day system footprint: 10m × 4m × 0.6m ht



<http://www.evapocycle.com/home/>

Summary

- Trenches and beds utilising soil absorption (and evapotranspiration) continue to provide an effective means of land application and treatment of effluent
- Soils can provide excellent renovation capacity when loaded at an appropriate DLR but trenches not suited to heavy soils without some site and soil modification
- Systems incorporating evapotranspiration require water balance sizing
- SSE very important in designing systems and design needs to be undertaken by trained persons

Centre for Environmental Training

