

On-site Wastewater Management Training Course

Secondary Treatment; Treatment Wetlands and Reed Beds


Honorary Associate Professor Phillip Geary
School of Environmental & Life Sciences
The University of Newcastle NSW

Centre for Environmental Training




Treatment Wetlands and Reed Beds

- Increasingly popular as a secondary treatment option for BOD, TSS and FC reduction
- Low-maintenance and relatively inexpensive
- Robust performance and seen as “natural” treatment - “ecotechnology”

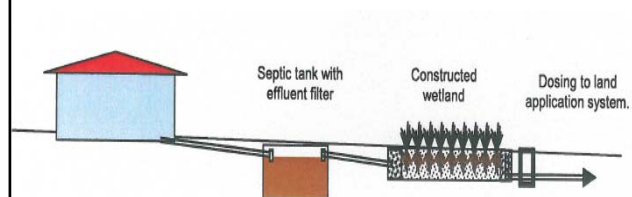

Treatment Processes


- Sedimentation, filtration and adsorption
- Gas loss/volatilization
- Uptake of metals and nutrients by plants
- Bacterial degradation by ultra-violet light, die-off and predation
- Decomposition of organic matter

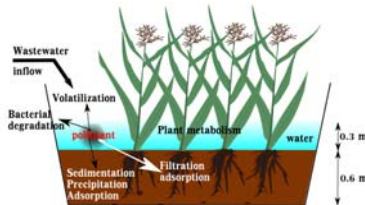

Centre for Environmental Training



Wetland Systems

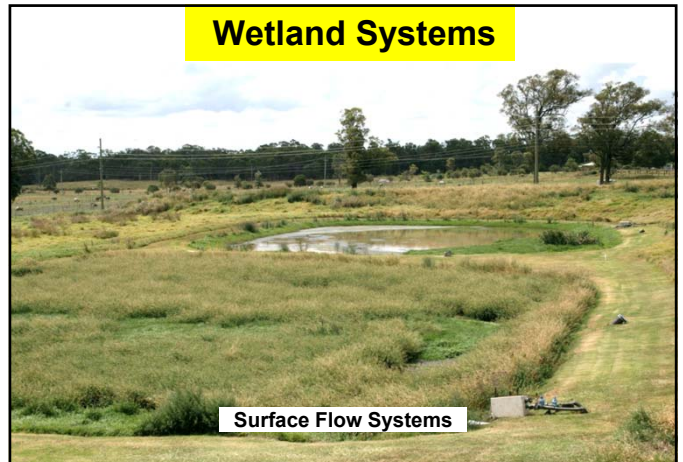

Surface Flow Systems

Wetland Systems



Subsurface Flow Systems

Wetland Systems




Floating Systems

Subsurface Flow Systems

- SSF systems preferable for domestic on-site treatment
- Used for treating combined waste or greywater only (also excess from waterless (composting) systems)
- Installed after primary treatment devices and considered a secondary system
- Grease and fat removal in septic tank pre-wetland
- Reed bed may be integrated with site landscape plan



Horizontal SSF Systems

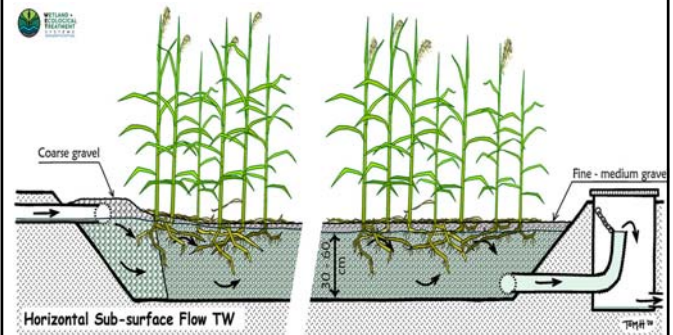


Source: <https://wetsystems.com.au/>

Centre for Environmental Training



Vertical SSF Systems

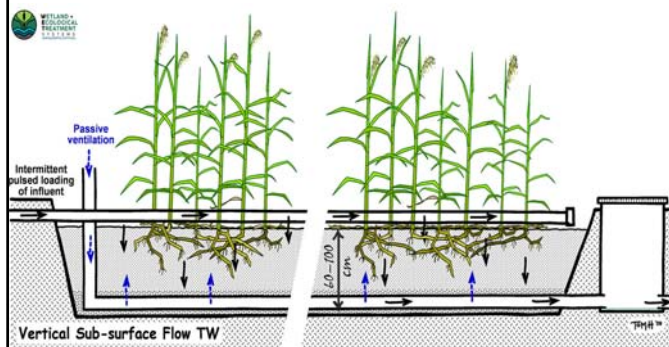

Source: <https://wetsystems.com.au/>

Centre for Environmental Training




What Do Plants Do?

- Control algal growth
- Take-up nutrients
- Provide an oxygen source
- Develop strong algal and bacterial biofilms in root zone where treatment occurs



Source: Aqua Biofilter




What Do Plants Do?



- Transport gases to and from the root zone via **aerenchyma** which are airways running from the aerial parts of the plant to the roots
- Aerenchyma assist with gas diffusion
- Rhizomes provide sites for oxidation while adjacent soils remain anaerobic (biofilms grow on submersed stems and leaves)
- Bacteria colonise and perform a wide variety of chemical conversions



Role of Substrate

- Provide rooting medium for wetland plants
- Support nutrients for plant growth
- Provide capacity to store water in pore spaces
- Adsorb to limited degree contaminants and reduce effluent concentrations
- Buffers pH which assists in maintaining uniform bio/geochemical reactions

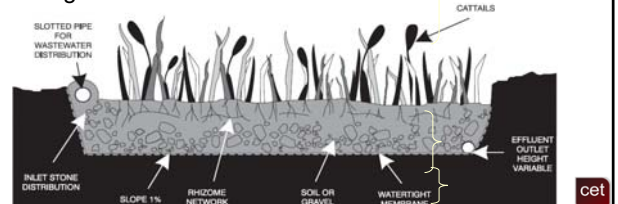

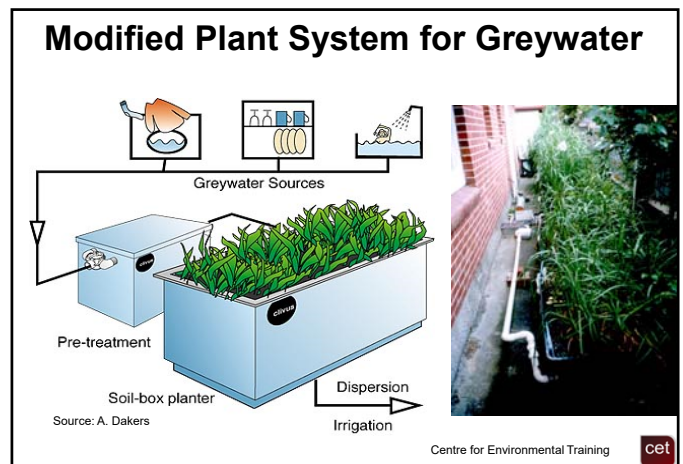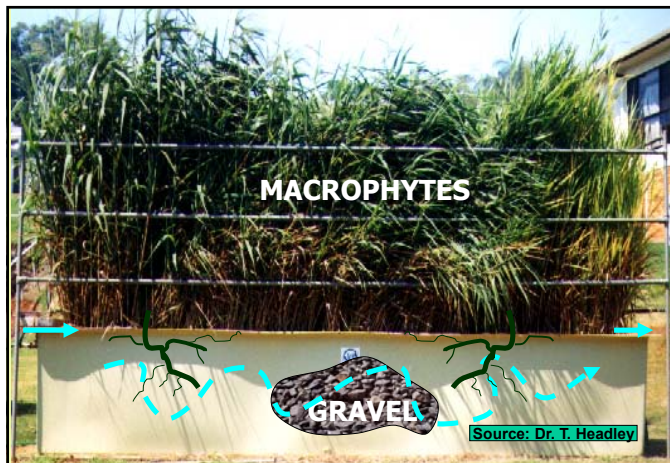

SSF Design Considerations

- Site selection/location
- Sizing for design hydraulic load and required HRT (treatment is a function of HRT)
- Liner - impermeable membrane or compacted clay
- Multiple beds – parallel or series?

A photograph of a constructed wetland system in a rural setting. It features a large, rectangular wetland bed with a mix of reeds and other plants. The bed is surrounded by a grassy field. A small green box at the bottom right contains the text "Centre for Environmental Training" and the logo "cet".

SSF Design Considerations

- Inlet structures to ensure uniform flow distribution
- Adjustable water level control
- Outlet/collection devices - dosing sump and pump well capacity
- Gravel sizes
- Macrophyte plant species to be used
- Maintenance of reedbed including vegetation and weed management
- And after the reed bed?

A photograph of a constructed wetland system in a rural setting. It features a large, rectangular wetland bed with a mix of reeds and other plants. The bed is surrounded by a grassy field. A small green box at the bottom right contains the text "Centre for Environmental Training" and the logo "cet".

Sizing

- Sizing can be based on simple rule-of-thumb approaches for "typical" situations. Guides often suggest different specific area requirements per Population Equivalent (PE) to achieve Secondary Treatment quality (20/30 standard)

- 2 m² up to 6 m² of wetland treatment area per PE/day for combined wastewater
- HRT can be determined for a particular level of treatment but is typically recommended about 5-7 days

- For greywater design 3 m² PE/d

Examples	Combined Wastewater	Greywater Only
Area of Reed Bed	24 m ²	17 m ²

Centre for Environmental Training



Example of SSF Area and Dimensions

BR/ PE	Hydraulic Load (L/d)	Surface area (m ²)	Suggested width (m)	Suggested length (m)	L:W ratio
3/5	900	30-33	4.5	7.2	1.6

Source: Table 1 in Tanner, C. Headley, T. & Dakers, A. (2011) Guideline for the Use of Horizontal SSF Constructed Wetlands in On-site Treatment of Household Wastewaters, NIWA, Hamilton, NZ

Rule of Thumb Sizing (HRT 7 days)

Water Depth (m)	Surface Area/p (m ²) All Wastewater	Surface Area/p (m ²) Greywater
0.3	6.5	5
0.4	5	4
0.5	4	3
0.75	3	2.5

Source: Table 1 in Lismore City Council (2005) The Use of Reed Beds for the Treatment of Sewage and Wastewater from Domestic Households

Centre for Environmental Training



Gravel Media and Plants

- Depth of gravel bed media typically 40 cm with water level maintained about 5 cm below gravel surface
- Plant selection - native wetland nursery species
- Low stature and high stature growth forms (*plants/m²*)
- Issue of plant senescence and on-going maintenance (including whether to harvest) plus managing invasive weeds

Zone	Gravel	Size Range (mm)	Porosity (%)
Inlet & outlet zones	Coarse	40-60	45
Main wetland	Fine, angular	10-20	40



Recommended Species

Floating plants:

- Lemna spp*, *Wolffia spp*

Submergents:

- Myriophyllum*
- Potamogeton*

Emergents:

- Typha*
- Phragmites*
- Eleocharis*
- Schoenoplectus*
- Baumea*



Centre for Environmental Training



System Performance

- Properly designed, installed and serviced SSF reed beds can provide secondary treatment of ST effluent and produce 20/30 standard TSS/BOD
- HRT important as removal of nutrients is by biomass uptake and substrate adsorption
- Median levels of FC can be reduced by approx. 99% (2 log reduction)
- Reduction of N and P varies widely over time (variable for TP but initially high, later decreasing depending on substrate used; can be good for TN but dependent on oxidation and biochemical conversion of N)
- Treated effluent should be discharged to an appropriate land application system

Centre for Environmental Training



Further Reading

- Lismore City Council (2005) The Use of Reed Beds for the Treatment of Sewage and Wastewater from Domestic Households, Lismore NSW
- Tanner, C. Headley, T. & Dakers, A. (2011) Guideline for the Use of Horizontal SSF Constructed Wetlands in On-site Treatment of Household Wastewaters, NIWA, Hamilton, NZ
- UN-HABITAT (2008) Constructed Wetlands Manual. UN-HABITAT Water for Asian Cities Programme, Nepal, Kathmandu
- USEPA (2004) Constructed Treatment Wetlands, Office of Water
<https://nepis.epa.gov/Exe/ZyPDF.cgi/30005UPS.PDF?Dockey=30005UPS.PDF>
- <https://wetsystems.com.au/>
- <http://www.rootzone.com.au/>

Centre for Environmental Training

