

On-site Wastewater Management Training Course

Primary Treatment

Septic Systems

Centre for Environmental Training 

Septic Tank

- Is the most common type of domestic primary treatment system
- Use can be traced back to about 1860 in France and about 1900 in Australia
- Current designs have changed little
- Septic systems and trenches provide the only form of wastewater treatment in many rural communities

Centre for Environmental Training 

Septic Tank

- Sealed tank prevents ingress and egress and reduces risk of odours, contamination, insects and vermin
- Provides a quiescent environment in which wastewater can settle and clarify between a settled sludge layer (below) and a surface scum layer (above)
- Accumulated sludge is periodically removed
- Clarified effluent passes downstream to land application or further treatment

Centre for Environmental Training 

AS/NZS1546:1

Details of septic tanks are provided in *AS/NZS1546:1 On-site domestic wastewater treatment units Part 1: Septic tanks*, which covers:

- Performance requirements and criteria
- Design and fittings
- Materials and testing

In TAS, septic tank must be CBOS accredited:
<https://www.cbos.tas.gov.au/topics/technical-regulation/plumbing-standards/wastewater/septic-tanks>

Centre for Environmental Training 

Septic Tanks

- Watertight, durable concrete, glass fibre reinforced resin or plastic tank



Source: Midwest Concrete



Source: Access Septic



Source: Everhard Industries

Centre for Environmental Training 

Septic Tanks

- Cylindrical, with vertical or horizontal axis, or rectangular in shape



Source: Grahams Concrete Pty Ltd



Source: Tumbay Bay Concrete Pty Ltd



Source: Hynds NZ

Centre for Environmental Training 

Baffles

- May include a partition or baffle divider to assist with hydraulic buffering and reduce carry-over of solids




Centre for Environmental Training



Septic Tank Access

- Inverted inlet and outlet fittings, with inspection openings above for access and pump-out

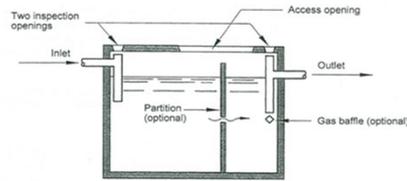

Source: Standards Australia



Source: BioSeptic

Centre for Environmental Training



Septic Tank Installation

- In ground, with top of tank at or just above ground surface to prevent stormwater ingress



Centre for Environmental Training



Risers

- If installed below ground a watertight riser is fitted to support access and inspection covers



Centre for Environmental Training



Ground Anchors

- Ground anchors may be required to prevent hydrostatic uplift



Centre for Environmental Training



Primary Treatment

A number of simple processes operate in a septic tank:

- Sedimentation
- Flocculation
- Flotation
- Anaerobic digestion
- Clarification

Centre for Environmental Training



Sedimentation

- Achieved by density settling in quiescent conditions
- Aided by the flocculation of suspended particles into larger aggregates
- Removes >60% of the suspended solids load
- Sludge or biosolids accumulates at base of tank

Centre for Environmental Training



Flotation

- Fats, oils, grease, surfactants and other low density materials rise to the surface and form a scum layer
- Scum retained in the tank by an inverted outlet pipe (tee) or baffle
- Fully formed scum layer precludes oxygen, creates anaerobic conditions which assists in the breakdown of organic solids and prevents escape of odours

Centre for Environmental Training



Scum Layer or Crust



Centre for Environmental Training



Scum Layer or Crust



Centre for Environmental Training



Anaerobic Digestion

- Organic material retained at the base of the tank undergoes microbiologically facilitated facultative and anaerobic decomposition
- Organic material is converted to stable compounds and gases such as carbon dioxide (CO₂), methane (CH₄) and hydrogen sulphide (H₂S)
- Retained sludge comprised mainly of lignous material that is difficult to decompose and will continue to accumulate

Centre for Environmental Training



Clarification

- Settled and skimmed wastewater retained within the central portion of the septic tank
- Re-suspension of settled solids is minimised under quiescent conditions
- Tanks are appropriately sized to allow for maximum solids settling
- Effluent is drawn from the clarified liquid between the sludge and scum layers and discharged for further treatment

Centre for Environmental Training



Septic Tank

- Provides capacity for a minimum of 24 hours hydraulic residence time for daily flow @ 150L/person/day
- Provides storage capacity for accumulated sludge @ 80L/person/year (with 3-5 year pumpout frequency)
- Prevents scum from moving downstream
- Starts microbiological degradation to reduce BOD₅, pathogens and settled solids

Centre for Environmental Training



Septic Tank Capacity (AS/NZS1547:2012)

All-waste septic tank capacities

| Persons | Bedrooms | Average daily flow (L) | Tank capacity |
|---------|----------|------------------------|---------------|
| 1 - 5 | 1-3 | Up to 1,000L | 3,000L |
| 6 - 7 | 4 | 1,000 - 1,400L | 3,500L |
| 8 | 5 | 1,400 - 1,600L | 4,000L |
| 9 - 10 | 6 | 1,600 - 2,000L | 4,500L |

Source: Standards Australia Standards New Zealand

- Note tank size requirements for larger houses

Centre for Environmental Training



Sludge Accumulation

- Sludge in a residential all-waste septic tank accumulates at approximately 80L/person/year
- Pumpout interval is determined by tank capacity required for 24-hour residence time for daily load (varies from system to system)
- For example, a 3,000L septic tank provides 24-hour residence time for 1,000L daily load, plus up to 2,000L sludge and scum capacity i.e. 5 persons x 80L/person/year x 5 years

Centre for Environmental Training



Sludge Accumulation

Assess sludge and scum accumulation in a septic tank using either:

- Sludge Judge
- Sludge Depth Indicator (electronic)
- Pressure sensor operated septic tank monitoring system (fitted in tank)

Centre for Environmental Training



Sludge Judge



Centre for Environmental Training



Septic Tank Effluent Quality

| Parameter | Untreated domestic wastewater | Primary treated effluent |
|------------------|--|---|
| BOD ₅ | 200 - 300 mg/L | ~ 150 mg/L |
| Suspended Solids | 200 - 300 mg/L | ~ 50 mg/L |
| Total Nitrogen | 20 - 100 mg/L | 50 - 60 mg/L |
| Total Phosphorus | 10 - 25 mg/L | 10 - 15 mg/L |
| Faecal Coliforms | 10 ³ - 10 ¹⁰ cfu/100mL | 10 ⁵ - 10 ⁷ cfu/100mL |

Source: NSW DLG

Centre for Environmental Training



Primary Treatment

- Capable of removing approximately 25-35% of the BOD₅ load and more than 60% of the suspended solids load in raw domestic wastewater
- Solids accumulate in the base of the septic tank and liquids are discharged for further treatment
- Floating material (scum) accumulates on the liquid surface and provides an air tight seal, creating anaerobic conditions

Centre for Environmental Training



Outcomes

- Moderate reduction in the TN load
- Slight reduction in the TP load
- Limited pathogen removal
- High bacterial counts remain in effluent
- Septic tank effluent not suitable for direct environmental discharge
- Secondary treatment using aerobic processes (AWTS or sand filter etc.) or further treatment in a soil based system is required

Centre for Environmental Training



Outlet Filters

- Outlet filter improves standard septic tank performance
- Recommended for all septic systems, especially with Primary effluent in LPED or mound systems
- Filters of various designs are commercially available and can reduce the impacts of solids carry over to the land application area or secondary treatment system
- Should prevent discharge of solids >3mm particle size and achieve TSS <100mg/L
- Filters have a large surface area to limit clogging and reduce maintenance requirements
- Require regular inspection and cleaning

Centre for Environmental Training



Septic Tank Outlet Filters



Centre for Environmental Training



Fitting a Septic Tank Outlet Filter



Centre for Environmental Training



Fitting a Septic Tank Outlet Filter



Centre for Environmental Training



Cleaning a Septic Tank Outlet Filter



Centre for Environmental Training



Outlet Filter Performance

| Parameter | Concentration (mg/L) | | | % Improvement |
|--------------------|----------------------|-------------------------|----------------------|---------------|
| | Typical ST effluent | Without effluent filter | With effluent filter | |
| BOD ₅ | 450 | 180 | 130 | 28% |
| TSS | 503 | 80 | 50 | 38% |
| NH ₃ -N | 41 | 40 | 40 | 0% |
| Org. N-N | 29 | 28 | 28 | 0% |
| TKN-N | 70 | 68 | 68 | 0% |
| Org. P-P | 6.5 | 6 | 6 | 0% |
| Inorg. P-P | 11 | 10 | 10 | 0% |
| TP | 17 | 16 | 16 | 0% |
| Oil and grease | 164 | 25 | 15 | 40% |

Source: Crites & Tchobanoglous 1998

Centre for Environmental Training



References

- Care and maintenance of residential septic systems (2002) B3583, University of Wisconsin-Extension.
- Bounds, T.R., " Design and Performance of Septic Tanks," Site Characterization and Design of Onsite Septic Systems ASTM STP 901, M.S. Bedinger, A.I. Johnson, and J.S. Fleming, Eds., American Society for Testing Materials, Philadelphia, 1997.
- Stafford, D. and Whitehead J.H. 2005. *Septic Tank Outlet Filters*. In Patterson, R.A. and Jones, M.J. eds. *On-site '05 Performance Assessment of On-site Systems*. Lanfax Laboratories, Armidale, September 2005.

Centre for Environmental Training



References

- Stafford, D. and Whitehead J.H. 2007. *Performance of Septic Tank Outlet Filters*. In Patterson, R.A. and Jones, M.J. eds. *On-site '07 Innovation and Technology for On-site Systems*. Lanfax Laboratories. Armidale, September 2007.
- How to decommission an OWMS (septic tank). www.onsiteisite.com Members Area, Information Repository.

Centre for Environmental Training



Septic Tank Calculations

Question 1.

A new three bedroom house is supplied with reticulated water and has a 3,000L septic tank installed on construction. Assume that five people occupy the house.

- (i) Calculate the daily hydraulic load based on a design hydraulic load of 150L/person/day.

- (ii) Calculate the detention time of effluent in the septic tank at the outset.

- (iii) If sludge accumulates at the rate of 80L/person/year, calculate the amount of sludge that will accumulate in one year.

Question 2.

An older three bedroom house is supplied with reticulated water and is occupied by three people. On inspection, it is determined that the septic tank is of 2,300L capacity, but the tank is half full of sludge.

- (i) Calculate the daily hydraulic load based on a design hydraulic load of 150L/person/day.

- (ii) Calculate the annual sludge accumulation based on a sludge accumulation rate of 80L/person/year.

- (iii) A minimum of 24 hours detention must be maintained in the tank at all times. Calculate the length of time remaining before a pumpout will be required.

Septic Tank Calculations

ANSWERS

Question 1.

- (i) Daily hydraulic load = $5 \times 150\text{L/person/day} = 750\text{L/day}$
- (ii) Septic tank volume = 3,000L
Daily hydraulic load = 750L/day
Detention time = $3,000\text{L} / 750\text{L/day} = 4 \text{ days}$
- (iii) Occupancy = 5 persons
Sludge accumulation rate = 80L/person/year
Annual sludge accumulation = $5 \text{ persons} \times 80\text{L/person/year} = 400\text{L/year}$

Question 2.

- (i) Daily hydraulic load = $3 \times 150\text{L/person/day} = 450\text{L/day}$
- (ii) Occupancy = 3 persons
Sludge accumulation rate = 80L/person/year
Annual sludge accumulation rate = $3 \text{ persons} \times 80\text{L/person/year} = 240\text{L/year}$
- (iii) Tank capacity = 2,300L
Daily hydraulic load = 450L
Volume of sludge in tank = $2,300\text{L} / 2 = 1,150\text{L}$
Volume available for further sludge accumulation = $1,150\text{L} - 450\text{L} = 700\text{L}$
Sludge accumulation rate = 240L / year
Maximum time remaining prior to pumpout $700\text{L} / 240\text{L/year} = 2.9 \text{ years}$